





**GULLIVER**  
TECHNOLOGY



**GULLIVER®**

Horizontal paddle self-propelled mixer feeder

  
**SGARIBOLDI**  
INNOVATION, PERFORMANCE, PEOPLE

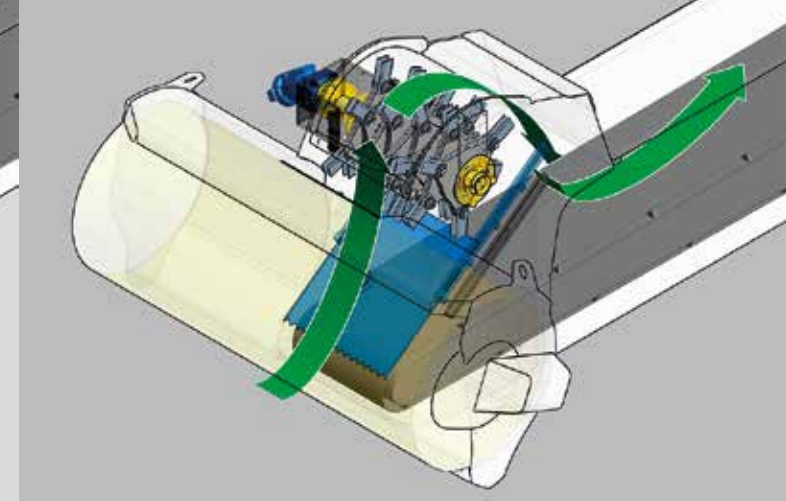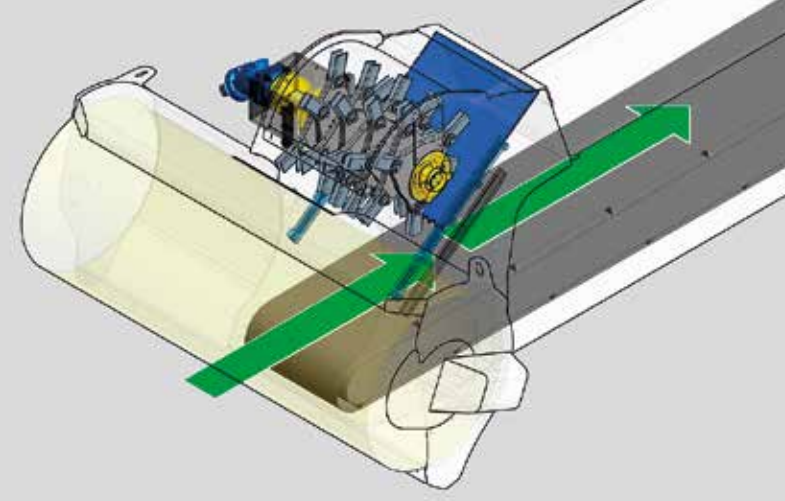

## PADDLE MIXING SYSTEM

Everything on the Gulliver model is designed to ensure **excellent mixing**; all the products flow uniformly into the mixing tank and are gently processed preserving their structures.

### Cuts first, then mixes

Intelligent loading and unparalleled mixing. The separation of the cutting and mixing phases with this system ensures:

- Greater precision
- Greater delicacy
- Reduced times
- Decreased consumption

## Different flows: optimization of loading and mixing action

The mixing tank is loaded uniformly, thanks to the patented electronic system, while the paddles gently mix the loaded ingredients.

Optional **stainless steel partial lining** of the mixing tank

**STAINLESS STEEL** *inside*

## Better performance with the slasher!

The cutting of long fiber products is fast and precise with the use of slasher, fully integrated into the loading system of your mixer.

This technology, developed to better act on the structure of each single ingredient, will allow you to definitively abandon the straw chopper and accelerate work operations through a single tool capable of cutting products with great speed and accuracy. It can be interested or disconnected as needed, allowing the operator total control over the cutting of individual products before the mixing phase, being able to vary the length according to specific needs.



# 6000 SERIES:

## THE PERFECT COMBINATION

The 6000 series, is designed to meet the specific requirements of farmers. Sgariboldi's experience led to the development of this series, which represents a perfect combination of compactness, agility and performance.

### Agile and compact

Ideal for **small and medium-sized farms**, the exceptional dimensions allow the maximum maneuverability, even in the most narrow spaces. The machine's excellent handling can be improved with the optional 4 wheel drive and steering systems.

- The **175 hp 4-cylinder VOLVO STAGE V** engine is placed transversely between the cab and the mixing tank order to offer an excellent working view and ideal weight distribution
- Equipped with **FAN DRIVE**, an intelligent device that carries out an electronic control on the cooling needs of the diesel engine allowing significant fuel savings and a remarkable noise reduction.



### GULLIVER® 6000

Equipped with STAGE V engines

- Available from 11 to 18 m<sup>3</sup>
- Diesel engine located between the cab and the mixing tank
- Diesel engine available up to 218 HP
- Front wheel drive
- Speed up to 40 Km/h

|                                                                 |                | GULLIVER 6011 | GULLIVER 6014 | GULLIVER 6018 |
|-----------------------------------------------------------------|----------------|---------------|---------------|---------------|
| Capacity                                                        | m <sup>3</sup> | 11            | 14            | 18            |
| Wheel drive                                                     |                | Front         | Front         | Front         |
| Length                                                          | mm             | 9000          | 10000         | 10500         |
| Max. width                                                      | mm             | 2180          | 2180          | 2450          |
| Height                                                          | mm             | 2600          | 2700          | 2900          |
| Loading drum width                                              | mm             | 1900 x 600    | 1900 x 600    | 1900 x 600    |
| Loading height                                                  | mm             | 4750          | 4750          | 4750          |
| Front and rear wheels                                           |                | 285/70-19,5   | 315/60-22,5   | 315/60-22,5   |
| Front exterior track                                            | mm             | 2060          | 2100          | 2100          |
| Rear exterior track 4WS                                         | mm             | 2050          | 2280          | 2450          |
| Low discharge door, vertical slide and chain discharge elevator | mm             | 670 x 800     | 820 x 800     | 820 x 800     |
| 4-cylinder VOLVO diesel engine                                  | kW / HP        | 129 / 175     | 129 / 175     | 129 / 175     |
| Drive speed                                                     | Km/h           | 0 - 20        | 0 - 20        | 0 - 20        |
| Weight                                                          | Kg             | 9000          | 9500          | 10000         |

The technical data and characteristics indicated in the tables will vary depending on the optionals mounted on the machine



# 7000 SERIES:

## COMPACT AND POWERFUL

The 7000 series is perfect to meet the needs of farmers who need a **compact size** machine but capable of great performance.

## Best performance, compact size

Being an intermediate solution between the 6000 series and 8000 series, **7000 series** is the result of an accurate design which, accompanied by first-rate components, allows maximum performance with reduced power consumption, significant energy savings and maximum agility thanks to its small size.

- The **218 hp 4-cylinder VOLVO STAGE V** engine is placed transversely between the cab and the mixing tank in order to offer an excellent working view and ideal weight distribution
- Equipped with **FAN DRIVE**, an intelligent device that carries out an electronic control on the cooling needs of the diesel engine allowing significant fuel savings and a remarkable noise reduction
- The **limited-slip front axle** allows a steering angle of **almost 40 degrees**, ensuring great handling, that can be further increased by the 4-wheel steering (optional). The 4-wheel-drive version is also available as an option.



### GULLIVER® 7000

Equipped with STAGE V engines

- Available from 21 to 25 m<sup>3</sup>
- Diesel engine located between the cab and the mixing tank
- Diesel engine available up to 238 HP
- Steering angle of 40 °
- Speed up to 40 Km/h

|                                                                 |                | GULLIVER 7021 | GULLIVER 7025 |
|-----------------------------------------------------------------|----------------|---------------|---------------|
| Capacity                                                        | m <sup>3</sup> | 21            | 25            |
| Wheel drive axle                                                |                | Front         | Front         |
| Length                                                          | mm             | 10800         | 10000         |
| Max. width                                                      | mm             | 2500          | 2700          |
| Height                                                          | mm             | 2850          | 3550          |
| Loading drum width                                              | mm             | 1900x600      | 1900x600      |
| Loading height                                                  | mm             | 5300          | 5300          |
| Front and rear wheels                                           |                | 385/55 R22.5  | 445/50 R22.5  |
| Low discharge door, vertical slide and chain discharge elevator | mm             | 820 x 800     | 1220 x 800    |
| 4-cylinder VOLVO Diesel engine                                  | kW / HP        | 160 / 218     | 160 / 218     |
| Drive speed                                                     | Km/h           | 0 - 30        | 0 - 30        |
| Weight                                                          | Kg             | 13000         | 14000         |

The technical data and characteristics indicated in the tables will vary depending on the optionals mounted on the machine

Great **agility** and reduced power consumption



Steering angle of **40°**



# 8000 S SERIES: POWER AND CONTROL

With the aim of create a new standard and ferry our flagship series into the future, Sgariboldi launches 8000 S, a new series of self-propelled heavy duty that transcends the market and the classics design limitations, unable to guarantee unrivaled performance combined with an immersive driving experience.  
Ideal for the large farms, the new 8000 S series stand out for the following features:

- **New design:** a sleek new look that embodies the Sgariboldi design philosophy, as well as offering an emotional experience to our customers
- **A vastly improved and enhanced hydraulic** system that limits dispersions and guarantees more power availability and lower fuel consumption, unrivaled in performance and efficiency
- **Powerful software:** conceived with I-Cab II and then transferred to Renesis II, enabling a total interaction with the machine. With an excellent controls standard the operator will experience ease and control like never before.
- **Improved load capacity** thanks to an excellent weight distribution
- **Enhanced cooling of the engine compartment**

## The top of the line

A wide range of features makes the 8000 S series complete and versatile:

- A 6-cylinder engine positioned at the back
- Automatic transmission
- Rear wheel drive or 4 wheel drive
- 2 or 4 wheel steering
- Hydraulic suspensions with levelling system (*optional*)
- Equipped with one of the most advanced hydraulic systems on the market
- Reversible engine fan FLAXXAIRE which regulates the air flow according with the diesel engine heat exchange requirements, ensuring lower fuel consumption and noise reduction
- Mixing tank cover designed to reduce the amount of dust generated by the mixing system (*optional*)

GULLIVER  
TECHNOLOGY



## GULLIVER® 8000


Equipped with STAGE V engines

- Available from 21 to 31 m<sup>3</sup>
- Diesel engine located in the back
- Available with 2WD/4WS and 4WD/4WS (*option*)
- J.D. engine with 255 - 300 hp - Powertech 6.8 L
- Rear wheel drive
- Speed up to 40 Km/h
- Available also in a version without the conveyor arm

|                                                 |                | GULLIVER<br>8021 | GULLIVER<br>8028 | GULLIVER<br>8031 |
|-------------------------------------------------|----------------|------------------|------------------|------------------|
| Capacity                                        | m <sup>3</sup> | 21               | 28               | 31               |
| Wheel drive                                     |                | Front            | Front            | Front            |
| Length                                          | mm             | 11000            | 11000            | 11500            |
| Max. width                                      | mm             | 2550             | 2700             | 2700             |
| Height                                          | mm             | 3000             | 3500             | 3500             |
| Loading drum width                              | mm             | 1900 x 600       | 1900 x 600       | 1900 x 600       |
| Loading height                                  | mm             | 5000             | 5000             | 5000             |
| Front wheels                                    |                | 385/55-22.5      | 445/65-22.5      | 445/65-22.5      |
| Rear wheels                                     |                | 385/55-22.5      | 445/65-22.5      | 445/65-22.5      |
| Front track                                     | mm             | 2200             | 2600             | 2600             |
| Rear track                                      | mm             | 2550             | 2670             | 2670             |
| Low discharge door and chain discharge elevator |                | 820 x 800        | 1220 x 800       | 1220 x 800       |
| 6-cylinder J.D. Diesel engine                   | kW / HP        | 187 / 255        | 187 / 255        | 187 / 255        |
| Drive speed                                     | Km/h           | 0 - 30           | 0 - 30           | 0 - 30           |
| Weight                                          | Kg             | 13000            | 17000            | 18000            |

The technical data and characteristics indicated in the tables will vary depending on the optionals mounted on the machine



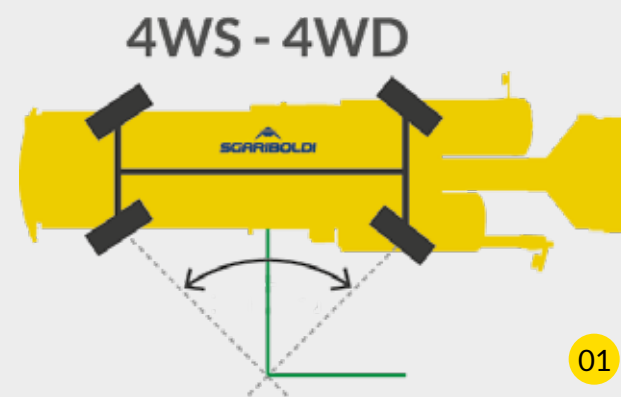

01 4WS - 4WD

02 Road homologation

03 Telematics

04 Completely customizable discharge elevator

## SPECIAL ACCESSORIES



05 Complete mixing tank cover

06 Centralized greasing system

07 Different type of magnet




08 Conveyor arm suspension

09 Air conditioning

10 Axle with hydraulic suspensions

11 Autolift

12 Different types of hopper

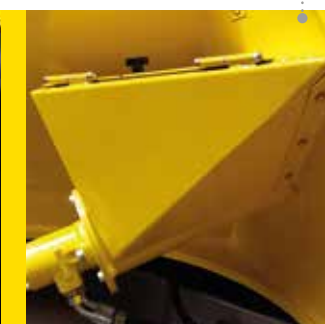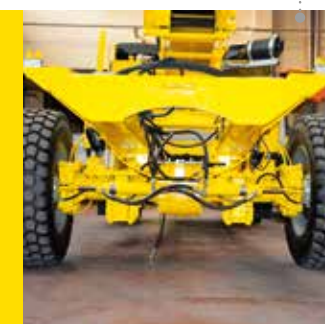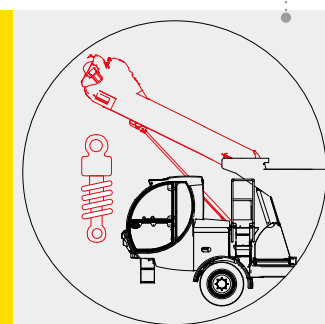



+39 0377 430 405



[sgariboldi.it](http://sgariboldi.it)



[info@sgariboldi.it](mailto:info@sgariboldi.it)



Sgariboldi



SgariboldiOfficial



[marketing@sgariboldi.it](mailto:marketing@sgariboldi.it)



[sgariboldi.official](https://www.instagram.com/sgariboldi.official)



SGARIBOLDI Srl



SGARIBOLDI S.r.l. Via Pietro Nenni 15 | 26845 Codogno - Lodi (Italy)

[www.sgariboldi.it](http://www.sgariboldi.it)